


SL111

Corradi's leading cassette system, the SL111 is adaptable to almost every outdoor shading situation.

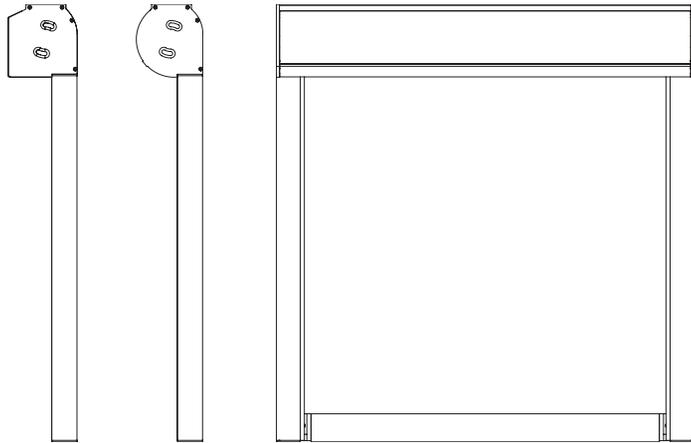

MAXIMUM DIMENSIONS

Width*	Height**
144"-216"	108"-192"

*manual units can only be made up to a 16' (192") width.

**maximum height may be less for certain fabrics.

See chart on pages 6/7 for reference.

Standard ShyZip (GS40) track can only be made up to a 12' (144") drop.

Tall Shyzip (GS40T) is used in cases where a standard awning worm gear is needed for screen operation.

The SL111 is the industry's benchmark shading system exclusively manufactured and sold by Corradi USA.

Base Model - The base model is gear operated with a non-detachable crank, no side tracks, and a round bottom bar. The headbox/cassette has the option of a curved front or square front.

Tracks - Upgrade options include *The Original* ShyZip fabric retention system or stainless steel cable guides. On *interior applications only*, the system can be used with Corradi's Blackout Track option.

Shyzip track can only be produced up to 12' drop.

Manual - including a detachable crank, a through-wall gear, and a worm gear with awning crank. The detachable crank comes with a magnetic connector and a practical magnetic bracket to hold the handle when not in use, and a fold angle crank. The detachable crank can be used with a manual shade up to 10' wide. The through-wall gear is designed for interior operation of a manual exterior shade up to 8' wide. The worm gear with awning crank can be used on a manual shade up to 16' wide.

Motorized - The SL111 is available with several motor configurations including a wired switch controlled motor or wireless remote controlled motor. Corradi offers the latest motors from Nice motors and Somfy motors. Any shade more than 16' wide must be motorized.


Sensors - The wireless options can be used with a sun, wind, or a sun & wind sensor to automatically operate under specific conditions.

Brackets - The SL111 is delivered ready to install with standard easy-to-use ceiling brackets. A wall bracket is offered as an option when required.

Installation - SEE PAGE 15

CORRADI USA NEW FRAME COLORS (matte finish)

2016-2017

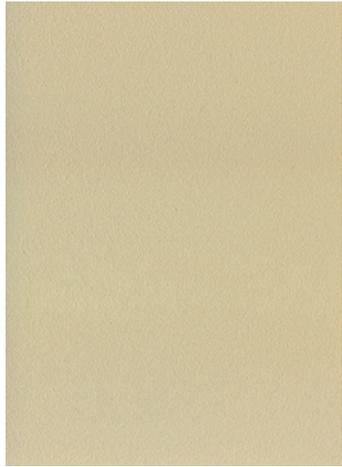

BEACH SAND




DUNE



GRANITE



CORTEN

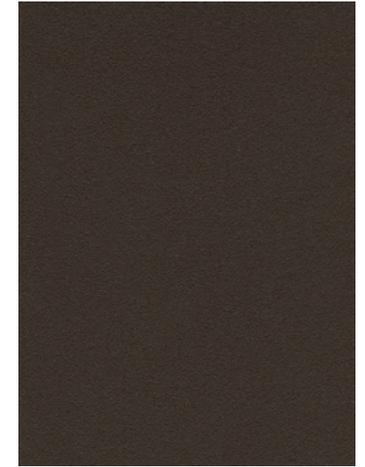

URBAN BRONZE



QUARTZ WHITE




GLACIER



ANTHRACITE




CARBON

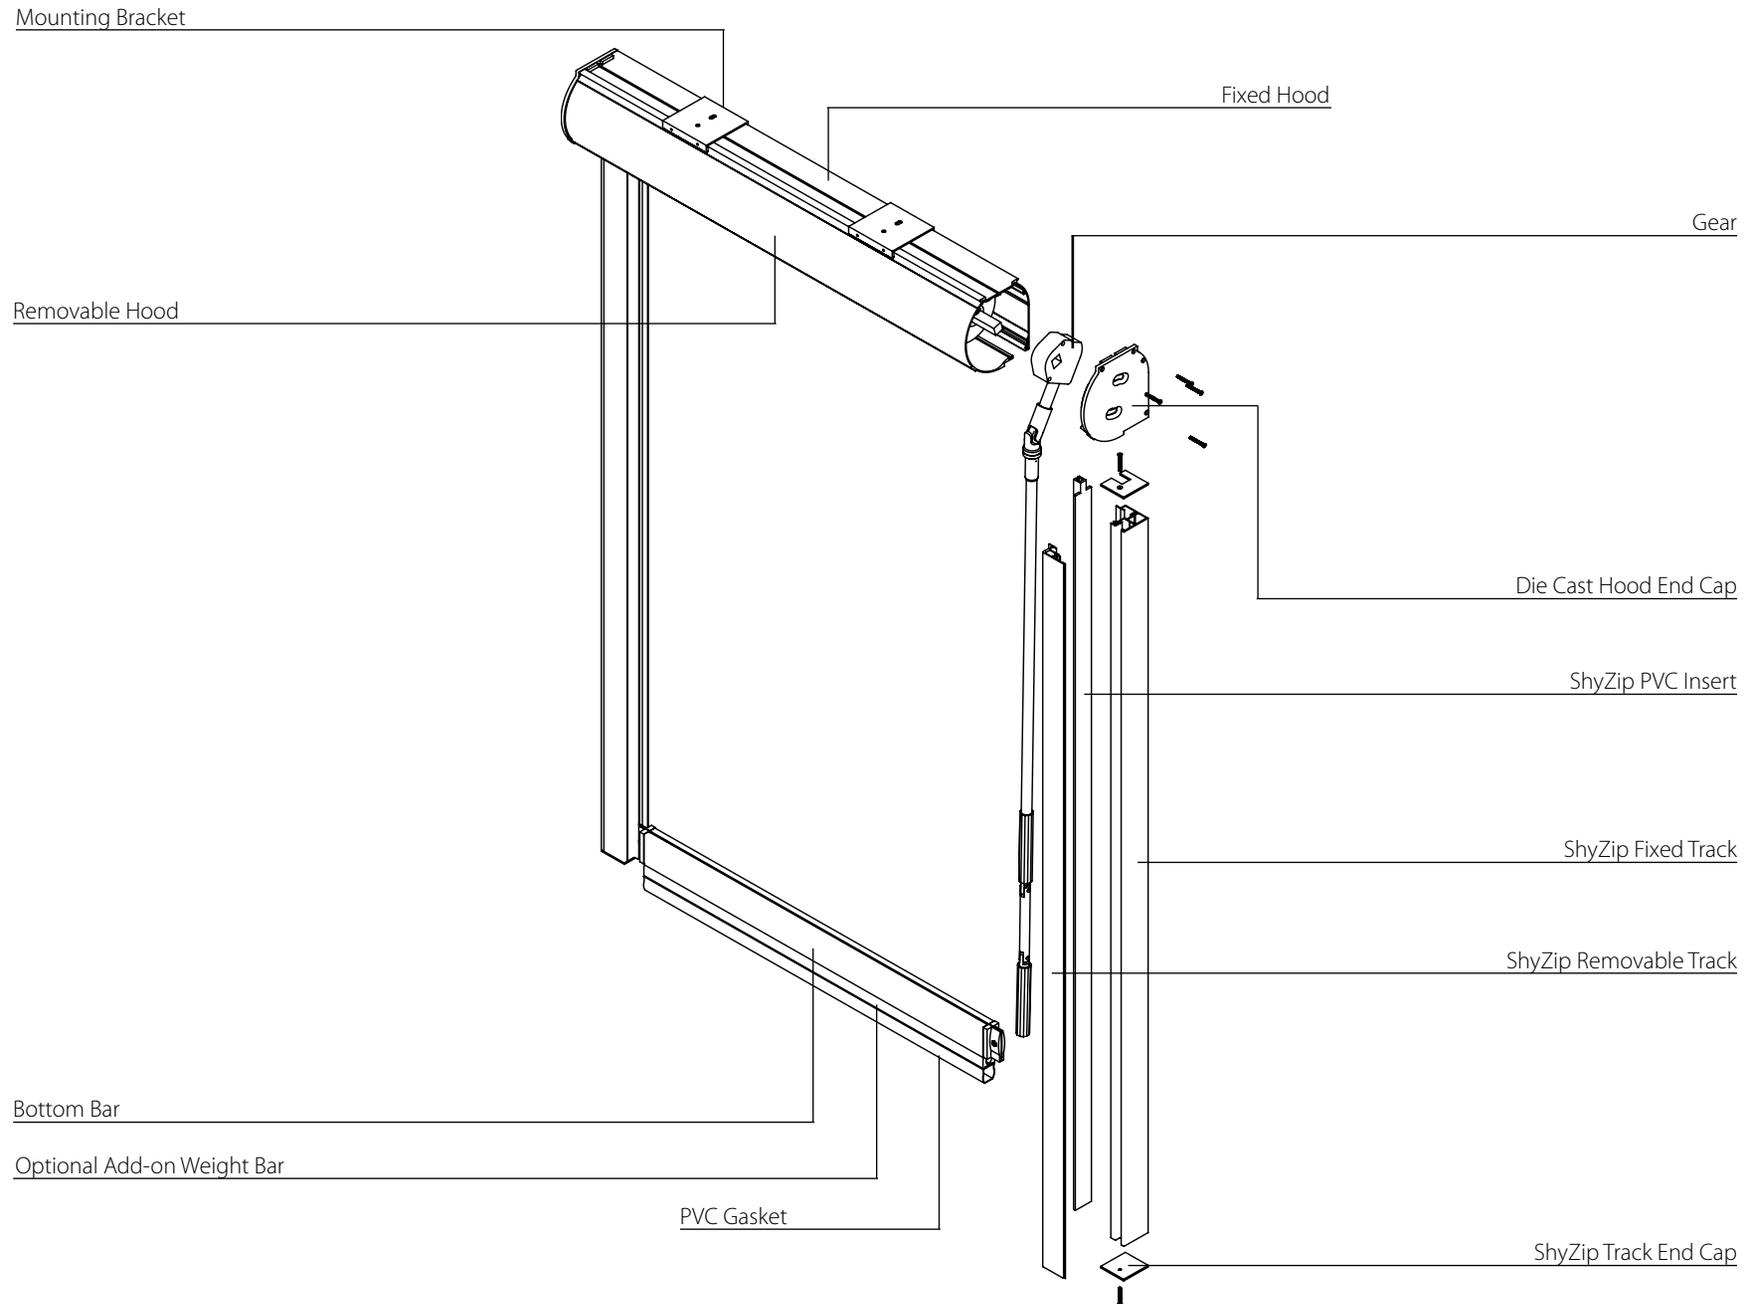


SL111 Dimensions

PROFILE SECTIONS




SL111 CASSETTE




SL111 SQUARE CASSETTE


SL111 WITH SHYZIP

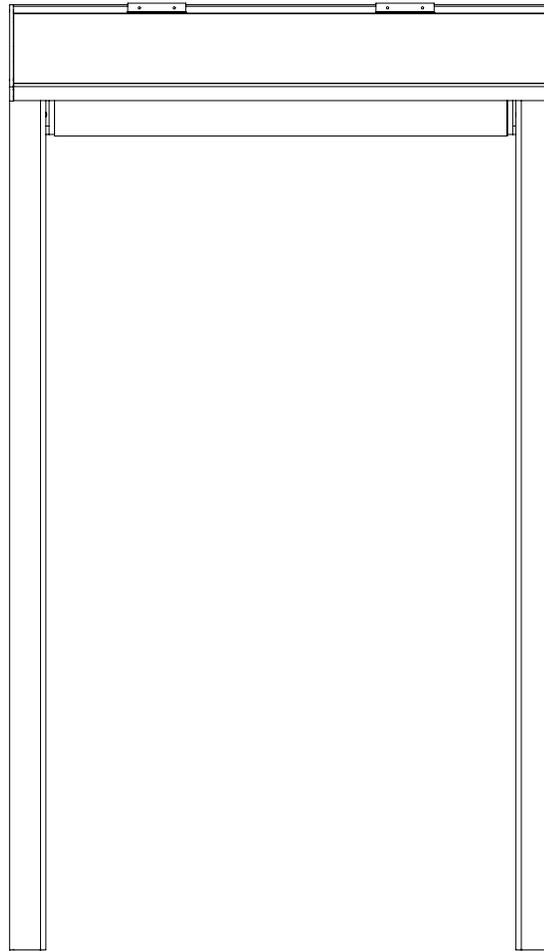

MANUAL GEAR W/ DETACHABLE MAGNETIC CRANK




MANUAL WORM GEAR W/ DETACHABLE AWNING CRANK

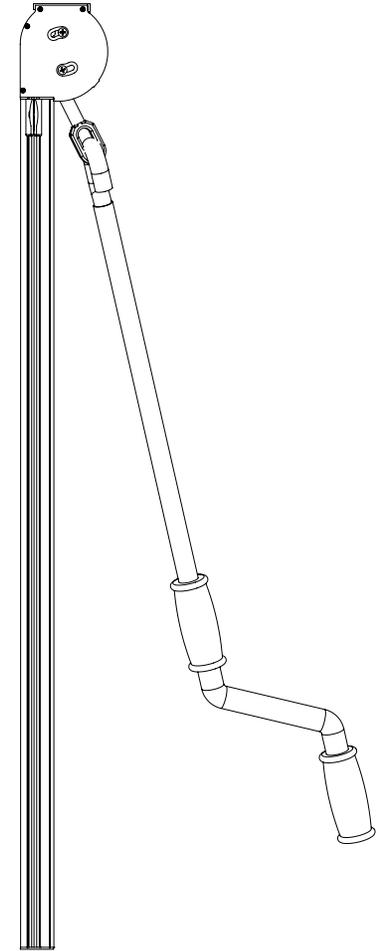

WALL BRACKETS

*L bracket color is clear anodized only. Front locking plate matches color of the cassette.






*Wall brackets include an extra charge.

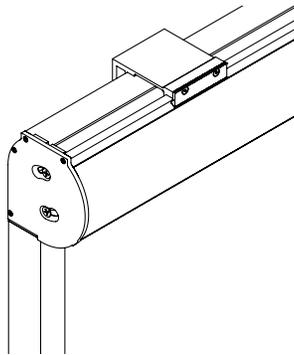

HOW TO INSTALL AN SL111 WITH BRACKETS

1. Remove packaging and ensure that you have all brackets and hardware.
2. Mount your brackets so that each bracket is roughly 4"-6" from each endcap. If you have 4 brackets mount the first pair of brackets as described in the previous sentence and then mount the additional brackets 6"-8" from the brackets already mounted. It is absolutely vital that your brackets be mounted level and plumb.
3. Once the brackets are installed, lift the complete box assembly onto the brackets and fasten with the proper set screws.
4. Once the unit is installed mount the relative tracks.

CEILING BRACKETS

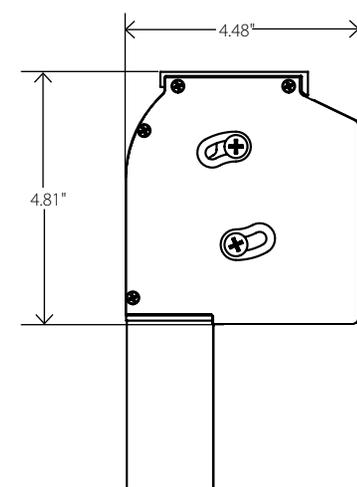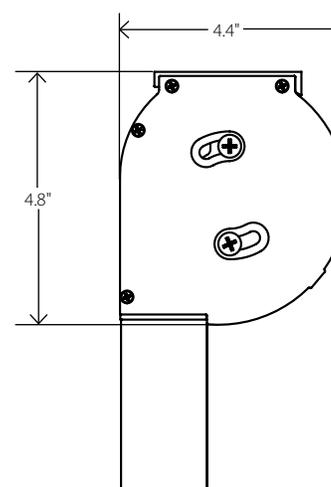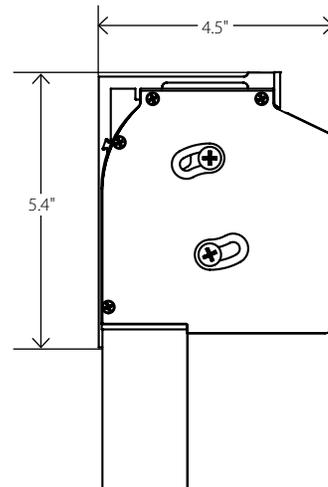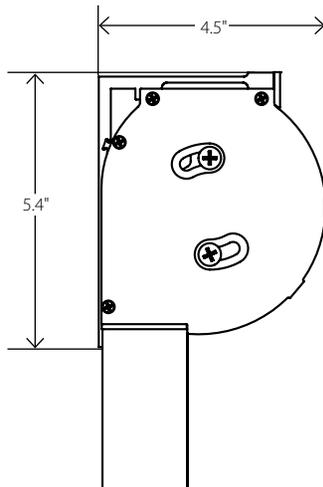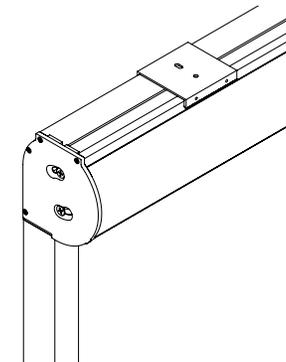

WARRANTY DISCLAIMER: READ CAREFULLY. CORRADI WILL NOT COVER ANY WARRANTY ON SL111 SYSTEMS THAT WILL BE INSTALLED WITHOUT ORIGINAL BRACKETS. WARRANTY WILL BE NULL & VOID IF INSTALLATION IS PERFORMED BY DRILLING DIRECTLY THROUGH THE BOX, BOTH ON WALL & CEILING APPLICATIONS, UNLESS PREVIOUSLY AUTHORIZED BY CORRADI FOR TECHNICAL REASONS.